



Residential Hybrid Electric Heat Pump Water Heater

VOLTEX® HYBRID ELECTRIC HEAT PUMP WATER HEATER

The Voltex Hybrid Electric heat pump water heater from A. O. Smith is the most cost effective energy-efficient option available for consumers who want to save money on their utility bills. Voltex can reduce water heating costs up to 66% and provide payback in 2-3 years. With annual savings of \$419 or more, there is no better way to go green than Voltex.

HOW DO THEY WORK?

- Absorb ambient heat from the surrounding air to heat water using a compressor and environmentally-friendly R134a refrigerant
 - Self-contained heat pump unit is integrated into the top of the tank
 - Multiple operating modes to maximize efficiency and performance

QUALIFIES FOR MANY STATE AND LOCAL UTILITY REBATES - CHECK WWW.DSIREUSA.ORG

FEATURES

INCREASED ENERGY EFFICIENCY

- Improved efficiency designed in, to ensure available hot water at the lowest possible cost
- Up to a 2.75 Energy Factor (EF) Rating conserves energy and meets ENERGY STAR® qualifications

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions. Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements.
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting backup heating elements help heat water according to environmental conditions, demand, and the chosen operating mode

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

DRY FIRE PROTECTION

- Control system checks to ensure the tank is full of water during start up to prevent dry firing the heating elements

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Easy to read temperature display (see back) shows temperature in °F or °C
- Advanced diagnostics convey error messages for service purposes. The last four error messages are saved in the control system memory.

OTHER FEATURES

- Ideal for basements or garage installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning

TEN YEAR LIMITED WARRANTY

- For complete information, consult written warranty or contact A. O. Smith Corporation



Low Lead Content





Residential Hybrid Electric Heat Pump Water Heater



ELECTRONIC USER INTERFACE

- User friendly, easy to read display
- LEDs clearly indicate the current operating mode
- Easily select operating mode:
 - Efficiency
 - Hybrid
 - Electric
 - Vacation
- Display communicates current status, mode and set point, and displays error messages when applicable
- Vacation mode programmable up to 99 days

EFFICIENCY MODE

- Utilizes the heat pump for all water heating
- Automatically reverts to heating element if ambient air or water temperatures are outside optimal operating range for heat pump

HYBRID MODE

- Utilizes the heat pump or heating element, depending on demand

ELECTRIC MODE

- Standard electric water heater operation

VACATION MODE

- Maintains tank temperature of 60°F (15.6°C) during vacation or extended absence to reduce operating costs and provide freeze protection


MODEL	GALLON CAPACITY	ENERGY FACTOR BY MODE			1ST HOUR RATING (GAL) BY MODE			HEIGHT (INCHES) A	DIAMETER (INCHES) B	HEIGHT TO WATER OUTLET (INCHES) C	HEIGHT TO WATER INLET (INCHES) D	HEIGHT TO T&P (INCHES) E	APPROX. SHIPPING WEIGHT (LBS)
		EFFICIENCY	HYBRID	ELECTRIC	EFFICIENCY	HYBRID	ELECTRIC						
SHPT-50	50	2.78	2.75	0.89	42.1	67.5	59.1	63	22	40-5/8	3-3/4	40-1/2	196
SHPT-66	66	2.71	2.74	0.91	59.7	81	79	61	27	38	4	38	285
SHPT-80	80	2.71	2.72	0.92	71	90	88	69	27	46	4	46	302

OTHER FEATURES:

- Sacrificial anode to protect against tank corrosion
- Environmentally-friendly non-CFC foam insulation
- Durable, tamper-resistant brass drain valve
- CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS:

- Requires provision for condensate draining; if a suitable drain is not available, a condensate pump is required
- 240 VAC 60Hz single phase 30 amp power supply

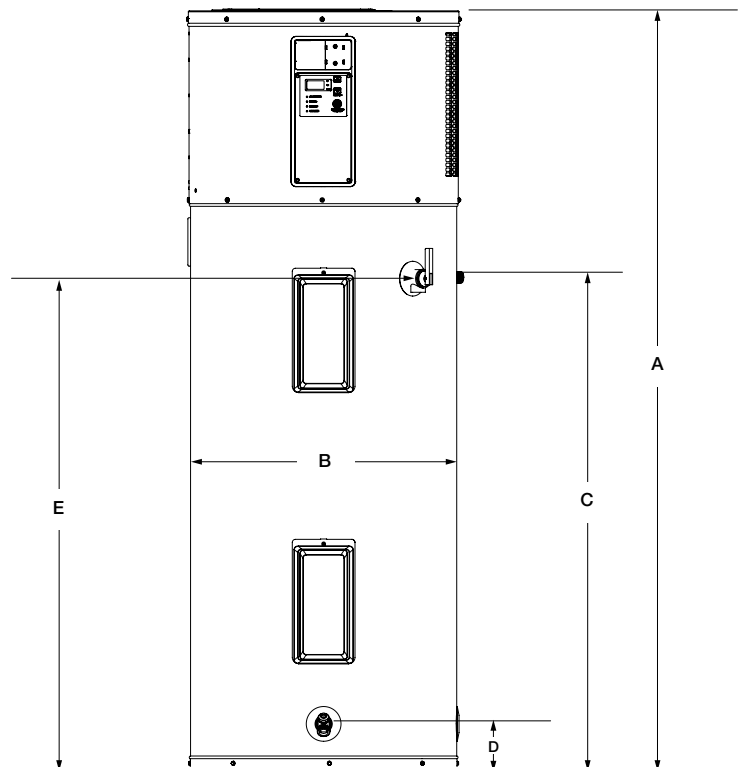

For Technical Information and Automated Fax Service, call 800-527-1953. A. O. Smith reserves the right to make product changes or improvements without prior notice.